


[Features]

- High contrast
- LVDS interface
- Long life LED backlight*¹ built in LED driver
- Replaceable lamp holder for backlight

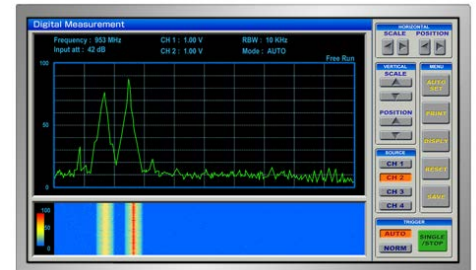

Pixel	1,366(H) x 768(V)
Display area	344.232(H) x 193.536(V)mm (15.6 inches (40cm) diagonal)
Display color	16,777,216 colors/ 262,144 colors
Pixel pitch	0.252(H) x 0.252(V) mm
Luminance	400cd/m ² (typ.)
Contrast ratio	900:1 (typ.)
Viewing angle ^{*2}	Up: 80°, Down: 80°, Left: 80°, Right: 80°
Response time ^{*3}	18ms (typ.)
Signal system	LVDS 1port RGB 8-bit/6-bit
Power supply voltage	LCD signal processing board:3.3V, LED driver:12.0V
Power consumption	10.6W (typ.)
Operating temperature	-20°C to +70°C
Storage temperature	-20°C to +80°C
Polarizer surface	Antiglare
Module size	363.8 (typ.) x 215.9 (typ.) x 10.8 (max.) mm
Weight	800g (typ.)
Backlight	LED backlight (Replaceable)
LED driver	Built in

*1: 70k hours long life LED

*2: Contrast ratio ≥ 10:1

*3: Ton+Toff (10%←→90%)

*All information is subject to change without notice.

*Screen images are simulated.

<Tianma Japan web site>

Japanese <https://www.tianma.co.jp/jp>

English <https://www.tianma.co.jp/en>