


[Features]

- Wide viewing angle
- Ultra high luminance
- Wide temperature range
- LVDS interface
- Selectable 8-bit or 6-bit digital signals for data of RGB
- Long life LED backlight*¹

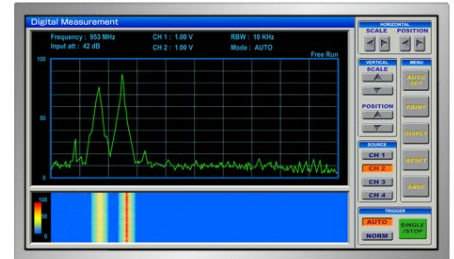

Pixel	1,366(H) x 768(V)
Display area	344.232(H) x 193.536(V)mm 15.6 inches (40cm) diagonal
Display color	16,194,277 colors/ 262,144 colors
Pixel pitch	0.252(H) x 0.252(V) mm
Luminance	1,250cd/m ² (typ.)
Contrast ratio	900:1 (typ.)
Viewing angle*²	Up: 80°(typ.), Down: 80°(typ.), Left: 80°(typ.), Right: 80°(typ.)
Response time*³	18ms (typ.)
Signal system	LVDS 1 port RGB 8-bit/6-bit
Power supply voltage	LCD signal processing board:3.3V
Power consumption	16.3W (typ.)
Operating temperature	-30°C to +80°C
Storage temperature	-30°C to +80°C
Polarizer surface	Antiglare
Module size	W 363.8 (typ.) x H 215.9 (typ.) x D 13.15 (max.) mm
Weight	1,070g (typ.)
Backlight	LED backlight
LED driver	Not provided

*1: 70k hours long life LED

*2: Contrast ratio ≥ 10:1

*3: Ton+Toff (10%←→90%)

*All information is subject to change without notice.

*Screen images are simulated.

<Tianma Japan web site>

Japanese <https://www.tianma.co.jp/jp>

English <https://www.tianma.co.jp/en>